Wintech MKB-28
Wintech MKB-29

Instruction Manual

Super Slim Mini Bluetooth Keyboard

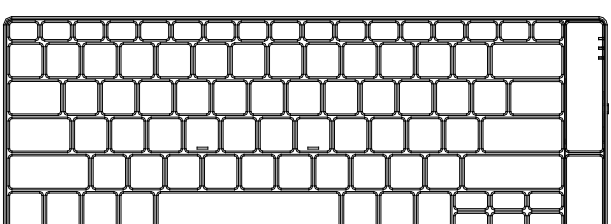

CAUTION: To use this device properly, please read the user's guide before installation.

VER:00

Installing the Batteries

This RF2.4GHz Touch keyboard use Built in lithium -ion rechargeable battery.

Charging step

This wireless touchpad built - in rechargeable battery .

1.When your touch pad not working smoothly due to lack of electricity , according to Figure 1 to charge the touchpad.

2.When your touch pad is fully charged , unplug the charging cable according to Figure 2 direction.



①



②

Hotkeys on the keyboard

Press FN+F1 to enter IOS(Apple) system,FN+F2 to enter Android system,FN+F3 to enter Windows system.

system / Keys	FN+F1（IOS)	FN+F2(Android)	FN+F3(Windows)
ESC	ESC	ESC	ESC
F1	Ejest	Ejest	F1
F2	Search	Search	F2
F3	Screen Save	Screen Save	F3
F4	Black Screen	Black Screen	F4
F5	Screen Lock		F5
F6	Mail		F6
F7	Previous Track	Previous Track	F7
F8	Play/Pause	Play/Pause	F8
F9	Next Track	Next Track	F9
F10	Volume Down	Volume Down	F10
F11	Mute	Mute	F11
F12	Volume Up	Volume Up	F12
PrtScr SysRq	PrtScr SysRq		PrtScr SysRq
Insert	Main Page		Insert

Installing the Bluetooth Wireless Keyboard

Installing the Bluetooth Wireless Keyboard into Your Computer

Step 1. Before using the Bluetooth keyboard with your computer, you need to check whether your computer is equipped with Bluetooth receiver.If not, you'll need to purchase an additional Bluetooth receiver and install it correctly onto your computer. Once your computer is Bluetooth-enabled, the setup applet's icon will appear in the windows taskbar as shown below.

Step 2. Right-click on the Bluetooth icon in the windows taskbar, and select “Add a Bluetooth Device”



Step 3. Tick the checkbox “My device is setup and ready to be found”,then click “Next”.

Step 4. Your computer will now scan for Bluetooth devices in your area and display found devices.At the same time press and hold both “Esc” and “k” keys on the keyboard simultaneously.

Step 5. Select the keyboard from the list of found devices and click “Next” to continue.

Step 6. We recommend our customers to select “no password” in the below window,then click “Next” to continue.


Add Bluetooth Device Wizard
Do you need a passkey to add your device?
Choose a passkey for me
Use the passkey found in the documentation:
Let me choose my own passkey:
Don't use a passkey
< Back
Next >
Cancel

Step 7. The system will automatically finish the installation after clicking "Finish"in below window.


Add Bluetooth Device Wizard
Completing the Add Bluetooth Device Wizard
The Bluetooth device was successfully connected to your computer. Your computer and the device can communicate whenever they are near each other.
To close this wizard, click Finish.
< Back
Finish
Cancel

Installing the Bluetooth Wireless Keyboard into Your iPhone/iPad

You must sync your iPhone/ iPad with the Bluetooth keyboard manually before using. No further sync is needed if the first sync runs successfully. Please follow the detailed instructions as below to complete the sync procedure.
Follow the path Settings ⇨ General ⇨ Bluetooth on your iPhone/ iPad to enable \the Bluetooth function on your iPhone/ iPad.





When Bluetooth is turned on, your iPhone/iPad will start searching for Bluetooth devices automatically. At the same time press and hold both “Esc” and “k” keys on the keyboard simultaneously. Your keyboard will be found by your iPhone /iPad automatically. When the keyboard is found, press the “Bluetooth Keyboard” appearing on the iPhone/ iPad screen,a window will pop up with a syncing passkey.Type in the passkey shown given by the iPhone/ iPad on the keyboard and then press the “enter” key. Now the Bluetooth keyboard should be connected to your iPhone/ iPad as shown in below picture.

"Bluetooth Keyboard" would like to pair with your iPad.
Enter the PIN code "9640" on "Bluetooth Keyboard", followed by the Return or Enter key.
Cancel

Other Considerations

1.Power-saving design : When the keyboard does not take any action about 2 seconds into hibernation , press any KEY or touch screen wake .
2.When you press the FN + F11 , the keypad keys do not output the value of users to leave after the others in order to prevent false triggering .3.2 AAA dry batteries : the whole boost to 3.0V. The whole system is 3.0V system .